

A REVOLUTIONARY SEALANT

BLACK MAMBA FHG



Instant bond even under pressure

High initial bond strength eliminates the need for mechanical fixing or support while bonding heavy objects. Cures without shrinking, resists vibration and remains flexible.

FEATURES

Excellent adhesion to a wide range of building materials and substrates, wet or dry, with no primer in most circumstances.

Permanent flexibility and exceptional resistance to extreme temperatures.

Can be painted over with water-based or acrylic paint.

Odourless, solvent free and isocyanate-free formulation makes it ideal for outdoor and indoor use and offers excellent resistance to UV and vibration.

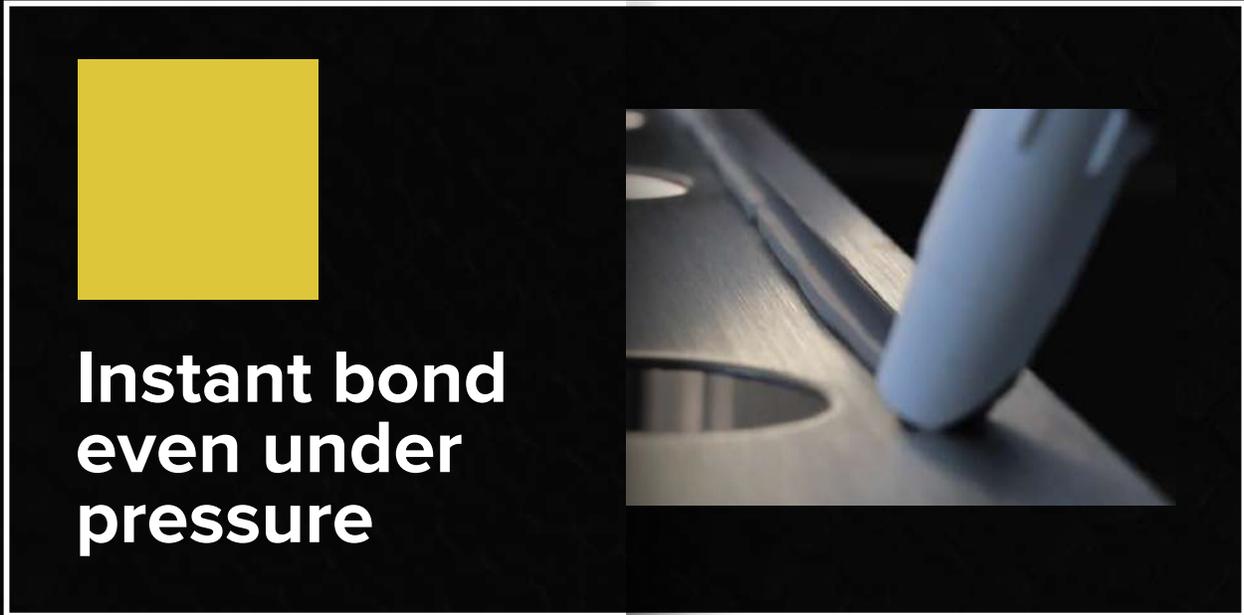
Fast curing and non-yellowing.

Easy to tool even in colder temperatures.



APPLICATIONS



BLACK MAMBA FHG



TECHNICAL FEATURES

	Product Number	Tensile Strength at Break (ASTM D638)	Elongation at Break (%)	Hardness Shore A (ASTM C661)	Skin Formation Time	Tack Free Time (ASTM C793)	Specific Gravity
Sealants	MS60 Black Mamba FHG High Tack	2.2 MPa	250	50 - 60	15 - 30 min	<24 hours	1.57
		320 PSI					
	 Other colours available upon request						
	MS60 Black Mamba FHG Construction	0.86 MPa	125	60 - 70	120 min	<48 hours	1.60 - 1.70
125 PSI							
 Other colours available upon request							
Black Mamba Construction meets ASTM C557, D3498, and AFG-01							



info@mpi-solutions.com
 2519 Rue Cohen,
 Saint-Laurent, Quebec
 H4R 2N5